


Specifications for
 Model: GM-BS-14
 Outdoor LED Baseball Scoreboard

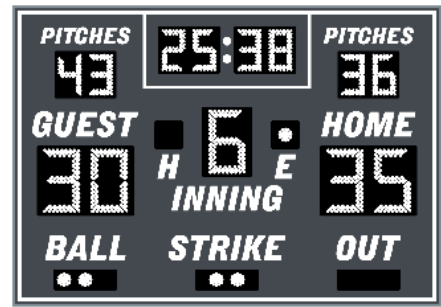

SCOREBOARDS.net

Cabinet Dimensions, Weight, and Electrical Requirements

- 7 ft. x 10 ft. x 6 in.
- 0 pounds
- 120 VAC, 2 amps, 60 Hz

Display Functions and Captions

Function	Height	LEDs	Range	Caption Text	Caption Size
Guest Score:	18 in.	336	0-99	GUEST	7 in. x 30 in.
Home Score:	18 in.	336	0-99	HOME	7 in. x 27 in.
Guest Pitches:	11 in.	200	0-99	PITCHES	5 in. x 25 in.
Home Pitches:	11 in.	200	0-99	PITCHES	5 in. x 25 in.
Clock:	11 in.	400	99 minutes	(none)	0 in. x 0 in.
Inning:	18 in.	168	0-9	INNING	7 in. x 31 in.
Ball:	4 in.	63	3 bullets	BALL	7 in. x 23 in.
Strike:	4 in.	42	2 bullets	STRIKE	7 in. x 33 in.
Out:	4 in.	42	2 bullets	OUT	7 in. x 18 in.
Hit:	4 in.	21	1 bullet	H	7 in. x 6 in.
Error:	4 in.	21	1 bullet	E	7 in. x 6 in.

Optional Equipment

- Wireless RF communication system
- Data cable
- Carrying case for control console
- Team Name in place of HOME
- Up to four console outputs for multiple displays

Standard Equipment

- Super-bright energy efficient LEDs (choose red or amber)
- 100% solid state microprocessor-controlled electronics
- Mounting hardware for clamping to posts
- 37-key control console with LCD display
- Junction box and 10 ft. patch cable for data
- Automotive grade baked-on enamel-based paint (choose from 16 standard colors)
- Rust-free aluminum cabinet
- ETL listed to UL standard
- Five-year limited warranty