


Specifications for  
 Model: GM-BS-31  
 Outdoor LED Baseball Scoreboard

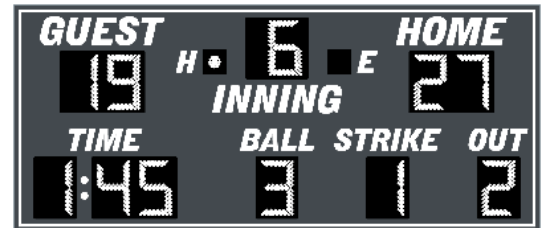

## SCOREBOARDS.net

---

### Cabinet Dimensions, Weight, and Electrical Requirements

- 6 ft. x 14 ft. x 6 in.
- 0 pounds
- 120 VAC, 2 amps, 60 Hz

### Display Functions and Captions

Function	Height	LEDs	Range	Caption Text	Caption Size
Guest Score:	18 in.	336	0-99	GUEST	9 in. x 40 in.
Home Score:	18 in.	336	0-99	HOME	9 in. x 36 in.
Inning:	18 in.	218	0-19	INNING	9 in. x 42 in.
Clock:	18 in.	504	9 hours	TIME	7 in. x 24 in.
Ball:	18 in.	168	blank, 1, 2, 3	BALL	7 in. x 24 in.
Strike:	18 in.	168	blank, 1, 2	STRIKE	7 in. x 34 in.
Out:	18 in.	168	blank, 1, 2	OUT	7 in. x 19 in.
Hit:	4 in.	21	1 bullet	H	7 in. x 6 in.
Error:	4 in.	21	1 bullet	E	7 in. x 6 in.

### Optional Equipment

- Wireless RF communication system
- Data cable
- Carrying case for control console
- Team Name in place of HOME
- Up to four console outputs for multiple displays

### Standard Equipment

- Super-bright energy efficient LEDs (choose red or amber)
  - 100% solid state microprocessor-controlled electronics
  - Mounting hardware for clamping to posts
  - 37-key control console with LCD display
  - Junction box and 10 ft. patch cable for data
  - Automotive grade baked-on enamel-based paint (choose from 16 standard colors)
  - Rust-free aluminum cabinet
  - ETL listed to UL standard
  - Five-year limited warranty
  - Toll-free technical support via phone for the life of the product
-