


Specifications for
 Model: DN-1700
 Outdoor LED Baseball Scoreboard

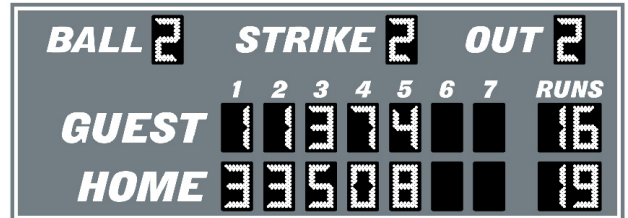

SCOREBOARDS.net

Cabinet Dimensions, Weight, and Electrical Requirements

- 5 ft. x 14 ft. x 6 in.
- 240 pounds
- 120 VAC, 3 amps, 60 Hz

Display Functions and Captions

Function	Height	LEDs	Range	Caption Text	Caption Size
Guest Runs-By-Inning:	11 in.	700	7 each 0-9	GUEST	8 in. x 40 in.
Home Runs-By-Inning:	11 in.	700	7 each 0-9	HOME	8 in. x 36 in.
Guest Total Runs:	11 in.	200	0-99	RUNS	5 in. x 18 in.
Home Total Runs:	11 in.	200	0-99	RUNS	5 in. x 18 in.
Ball:	11 in.	100	blank, 1, 2, 3	BALL	7 in. x 26 in.
Strike:	11 in.	100	blank, 1, 2	STRIKE	7 in. x 38 in.
Out:	11 in.	100	blank, 1, 2	OUT	7 in. x 21 in.

Optional Equipment

- Wireless RF communication system
- Data cable
- Carrying case for control console
- Team Name in place of HOME
- Up to four console outputs for multiple displays

Standard Equipment

- Super-bright energy efficient LEDs (choose red or amber)
- 100% solid state microprocessor-controlled electronics
- Mounting hardware for clamping to posts -- no need for on-site fabrication
- 37-key control console with LCD display
- Junction box and 10 ft. patch cable for data
- Automotive grade baked-on enamel-based paint (choose from 16 standard colors)
- Rust-free aluminum cabinet
- ETL listed to UL standard
- Five-year limited warranty
- Toll-free technical support via phone for the life of the product